



P1: M-Y536A
M-536A
P2: M-780A

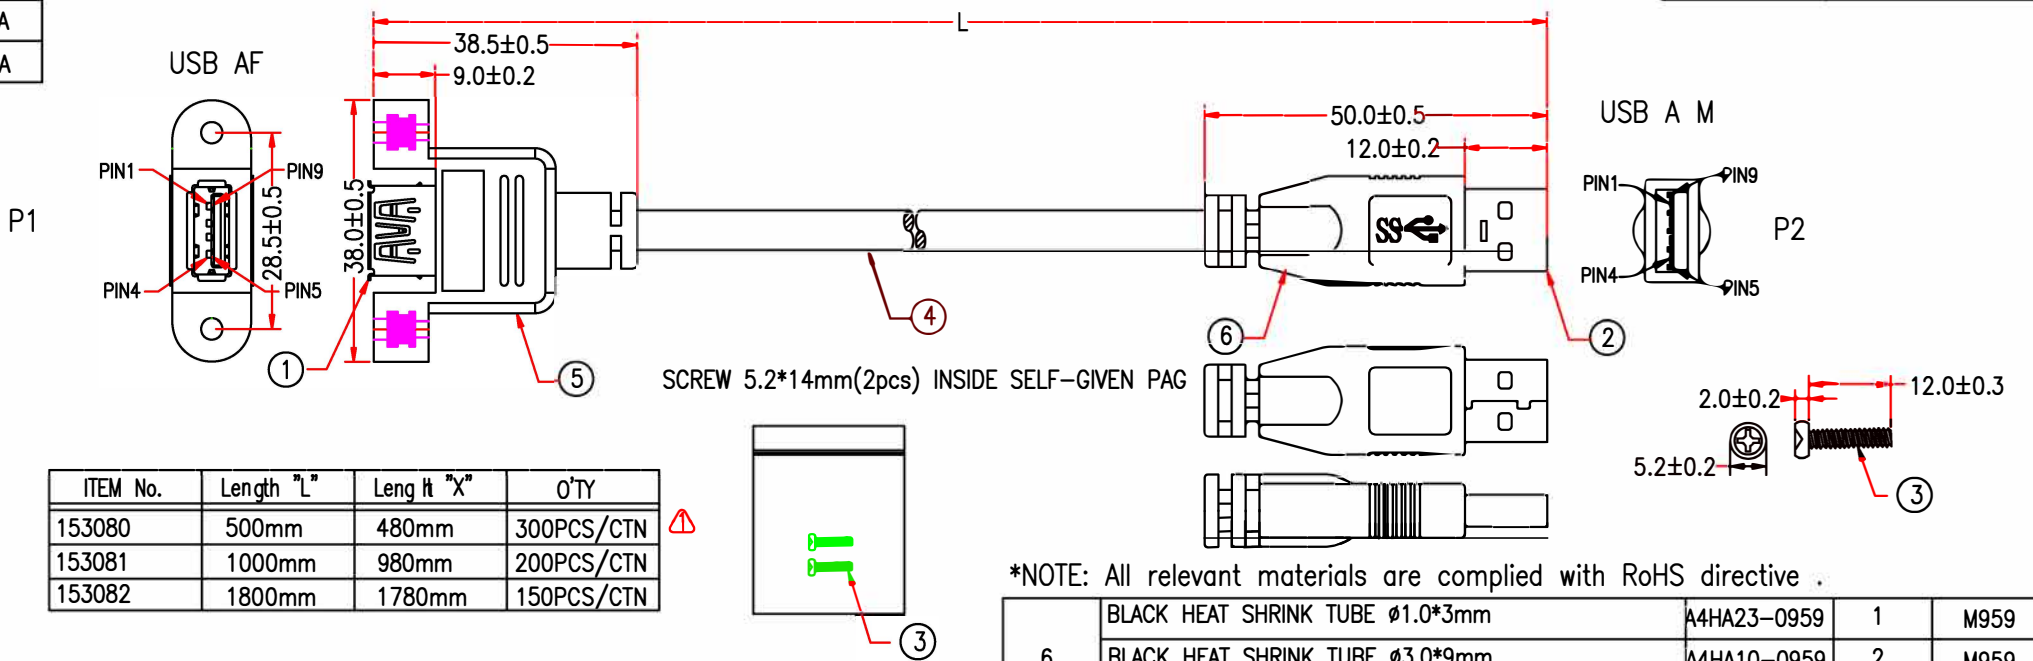

ITEM No.	Length "L"	Length "X"	QTY
153080	500mm	480mm	300PCS/CTN
153081	1000mm	980mm	200PCS/CTN
153082	1800mm	1780mm	150PCS/CTN



9J50-4			
P1		P2	
1	—	1	RED
2	—	2	WHITE
3	—	3	GREEN
4	—	4	BLACK
5	—	5	BLUE
6	—	6	YELLOW
7	—	7	SHIELD
8	—	8	PURPLE
9	—	9	ORANGE
7	—	7	SHIELD
SHIELD	—	SHIELD	

*NOTE: All relevant materials are complied with RoHS directive .

6	BLACK HEAT SHRINK TUBE ϕ 1.0*3mm	A4HA23-0959	1	M959
	BLACK HEAT SHRINK TUBE ϕ 3.0*9mm	A4HA10-0959	2	M959
	MOLDED PVC BLACK	H1BF01-0304K09		M304
5	BLACK HEAT SHRINK TUBE ϕ 1.0*10mm	A4HA23-0959	1	M959
	BLACK HEAT SHRINK TUBE ϕ 3.0*9mm	A4HA10-0959	2	M959
	HEX-NUT 5*4.0mm, #4-40	A6BC01-0095	2	M95
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
4	USB 3.0 CABLE, 28AWG*1PAIR+(28AWG*1PAIR+D+F-AL)*2PCS+24AWG*2C+AMA BRAID(65%), OD 5.8mm JACKET BLACK, DRAWING NO. EUAB2801P2802P2402C-371	H5KS04-0304K09	Xmm	M304
	MOLDED PVC BLACK	H1BF01-0304K09		M304
3	SCREW 5.2*14mm, 4-40#	A6AC12-0095	2	M95
2	USB A MALE 3.0, GOLD FLASH ON CONTACTS BLUE INSULATOR, SOLDER THREE PIECES TYPE	A1HA48-0454	1SET	M454
1	USB A FEMALE 3.0, GOLD FLASH ON CONTACTS, BLUE INSULATION	A1HC19-0454	1	M454
DESCRIPTION			QTY	Supplier

PART NO. 9J50-4		Revision:		Cable Length Unless Other Spec. Tolerances:	
APPROVED				0 ~200mm	±10mm
CHECKED	HU			201~1000mm	±20mm
DRAWING	JIANG			1001 ~1500mm	±25mm
DATE	15/DEC/18	ITEM NO.	153080	1501~2100mm	±30mm
				2100mm↑	±40mm

REV.4 2018.12.15	MODI FYPLUG SUPPLIER	CHECKED	
REV.3 2015.11.20	MODIFY CONN SUPPLIER FOR M656 TO M846 AND MODIFY I TM NO.		
REV.2 2014.12.09	MODI FYCONN SUPPLI ERFOR M108 TO M656 AND M432		
REV.1 2014.04.21	MODI FY 480mm "O"TY"		