

LogiLink_®

Gigabit PoE++ Injector, 60 W IEEE802.3bt Type 3

Art. No.: POE007


Up to 60 W power/data connection to a Gigabit PoE device over standard ethernet cable.

Features:

- » Connect your PoE-enabled network device to a non-PoE LAN switch port with full duplex Gigabit speed
- » Automatically detects PoE terminals and supplies inline power
- » Supports IEEE 802.3af/at/bt PoE standard
- » Safe with multiple protections
- » Integrated with power supply
- » Network distance up to 100 m
- » Plug & play, no driver installation required
- » Wall mountable



IP Phone

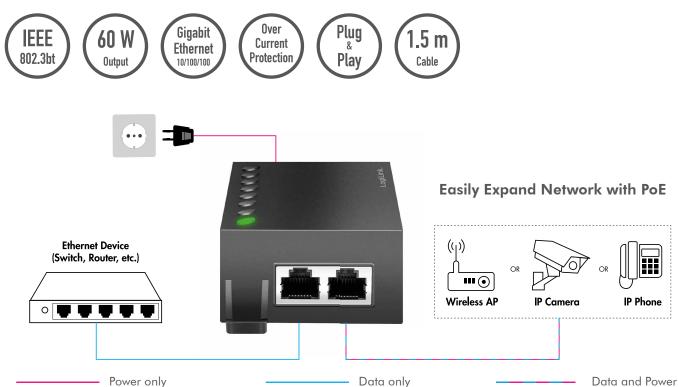

Fully Compatible with PoE, PoE+ and PoE++ Devices

PoE (802.3af)	Up to 15.4 W	IP Phones	IP Camera	(ip) THE Wireless AP		
PoE+ (802.3at)	Up to 30 W	IP Video Phones	VolP Phone	Alarm System	▶ Digital Signage	QQ III Audio System
PoE++ (802.3bt)	Up to 60 W	DTZ HD IP Cameras	Smart Lighting	Laptop Computer	Information Kiosk	Access Control

Specification:

Solution	IP8002	
Standard	IEEE802.3af, IEEE802.3at, IEEE802.3bt, IEEE802.3 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T	
Interface	1x RJ45 jack (LAN port), 1x RJ45 jack (PoE port)	
Input	230 V AC 50/60 Hz 1 A	
Voltage Range (at PSE)	54 V	
Maximum Power Delivery by PSE	60 W	
Power Pin Assignment	1/2 (-), 3/6 (+), 4/5 (+), 7/8 (-)	
LED Indicator	Green LED: AC power input; Blue LED: Power + data output	
Working Distance	Up to 100 m	
Protections	Over-current, over-voltage, overload and anti-interference	
Housing Material	ABS	
Operating Temperature	0-40°C	
Operating Humidity	10–90% RH (non-condensing)	
Color	Black	
Dimensions	13.8 x 6.3 x 3.4 cm	
Weight	200 g	
Cable Length	1.5 m	

Package Contents:

- » 1x PoE++ Injector
- » 1x Power Cable
- » 1x User Manual

Package Information:

- » Packing Dimension: 170 x 70 x 71 mm
- » Packing Weight: 0.4 kg
- » Carton Dimension: 375 x 350 x 300 mm
- » Carton Q'ty: 40 pcs
- » Carton Weight: 16.5 kg



