



Art no.: PS0015

DIN Rail Power Supply, 15 W

Technical Features

Universal AC input 100–240 V

Accepts AC or DC input (dual-use of same terminal)

DC 12 V/1.25 A, 15 W output

Output voltage adjustable

Operating ambient temperature range -40–+70°C

High I/O isolation voltage up to 4000 V AC

Industrial-grade design

Equipment of Overvoltage Category III (EN61558-1 standards)

Low standby power consumption, high efficiency

Low ripple & noise

Short circuit, overcurrent, overvoltage protection

DIN rail TS35X7.5/ TS35X15 mountable

Safety according to UL/IEC62368, IEC/EN61010, IEC60335, IEC/EN61558

Color: Black



PS0015



4 052792 072532


Made in China

www.2direct.de



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered trademarks of their respective owners.

Technical Drawing

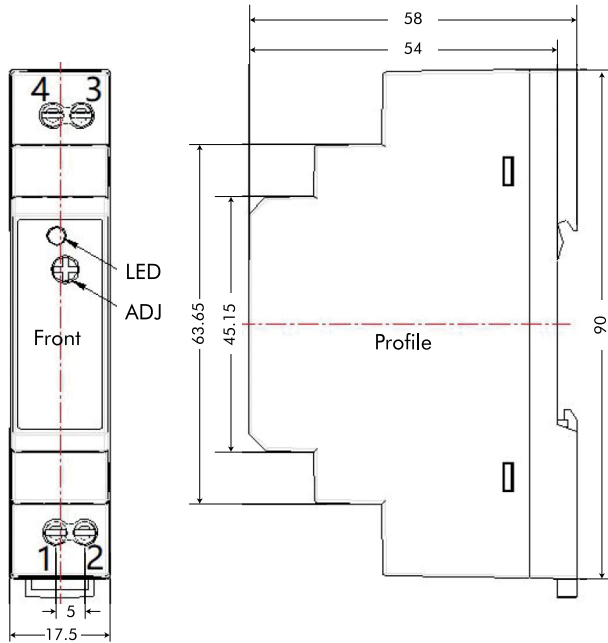

Pin-Out:

1	AC (N)
2	AC (L)
3	-Vo
4	+Vo

Note:

Unit: mm

ADJ: Adjust resistance to change output voltage

Wire range: 24-12 AWG

Tightening torque: Max. 0.4 N.m

Mounting rail: TS35, rails needs to connect safety ground

General tolerances: ± 1.00

Material: Plastic (UL94V-0)

Package Contents

1x DIN Rail Power Supply

1x User Manual

Packaging Information

Packing Dimension	98 x 61 x 24 mm
Packing Weight	0.081 kg
Carton Dimension	460 x 355 x 300 mm
Carton Q'ty	150 pcs
Carton Weight	10 kg

PS0015



4 052792 072532

Made in China

www.2direct.de



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered trademarks of their respective owners.